



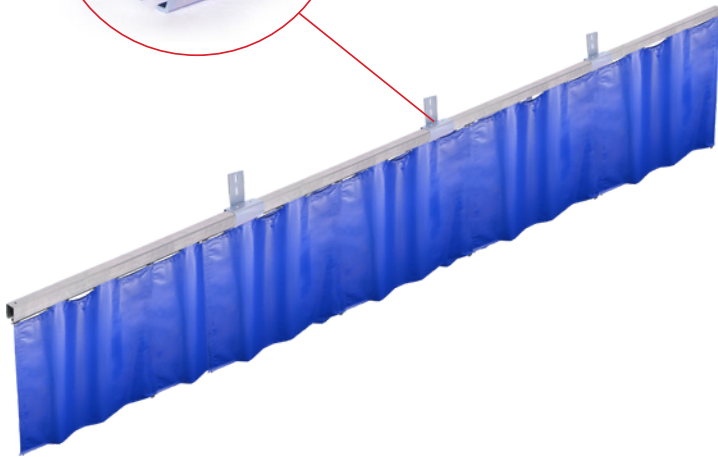


We offer the **Flange Up and Flange Down Wall Mounting System**. These mounts are typically used on an overhead door wall and very rarely directly attached to a wall. To retract the curtain you need to allow an 8" space on each side of the track. To prevent the curtain scraping on the wall. If the curtain is not intended to be retracted, the wall mount can be attached directly to a wall.




FEATURES

- ☆ Mostly used on a overhead wall
- ☆ Heavy Duty 16 Gauge Galvanized Steel
- ☆ Available in Flange Up and Flange Down
- ☆ Can be used in combination with other mounting systems


wall **Under Mount**
Flange Up

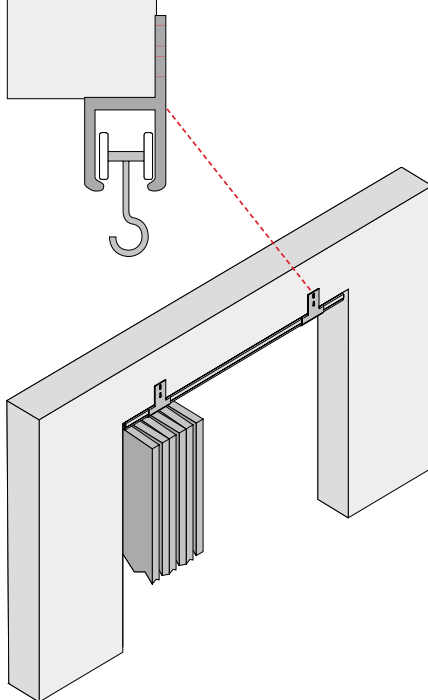

wall **Flush Mount**
Flange Up

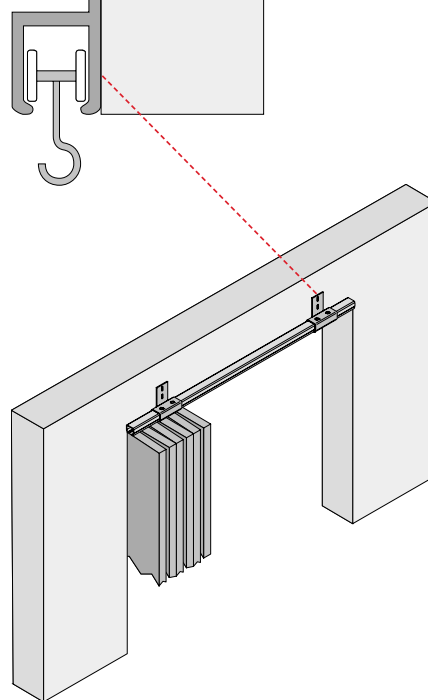

wall **Obstruction**
Flange Down

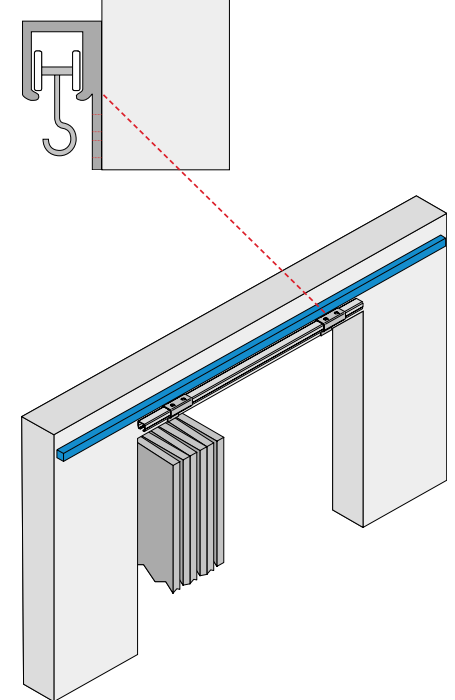




Wall Mount Split Support

- Flange Up or Down available
- Provides support to the track
- Does not connect track
- Can be placed anywhere along the track but not over a connector



Wall Mount End Stop

- Flange Up or Down available
- Includes 1 set screw

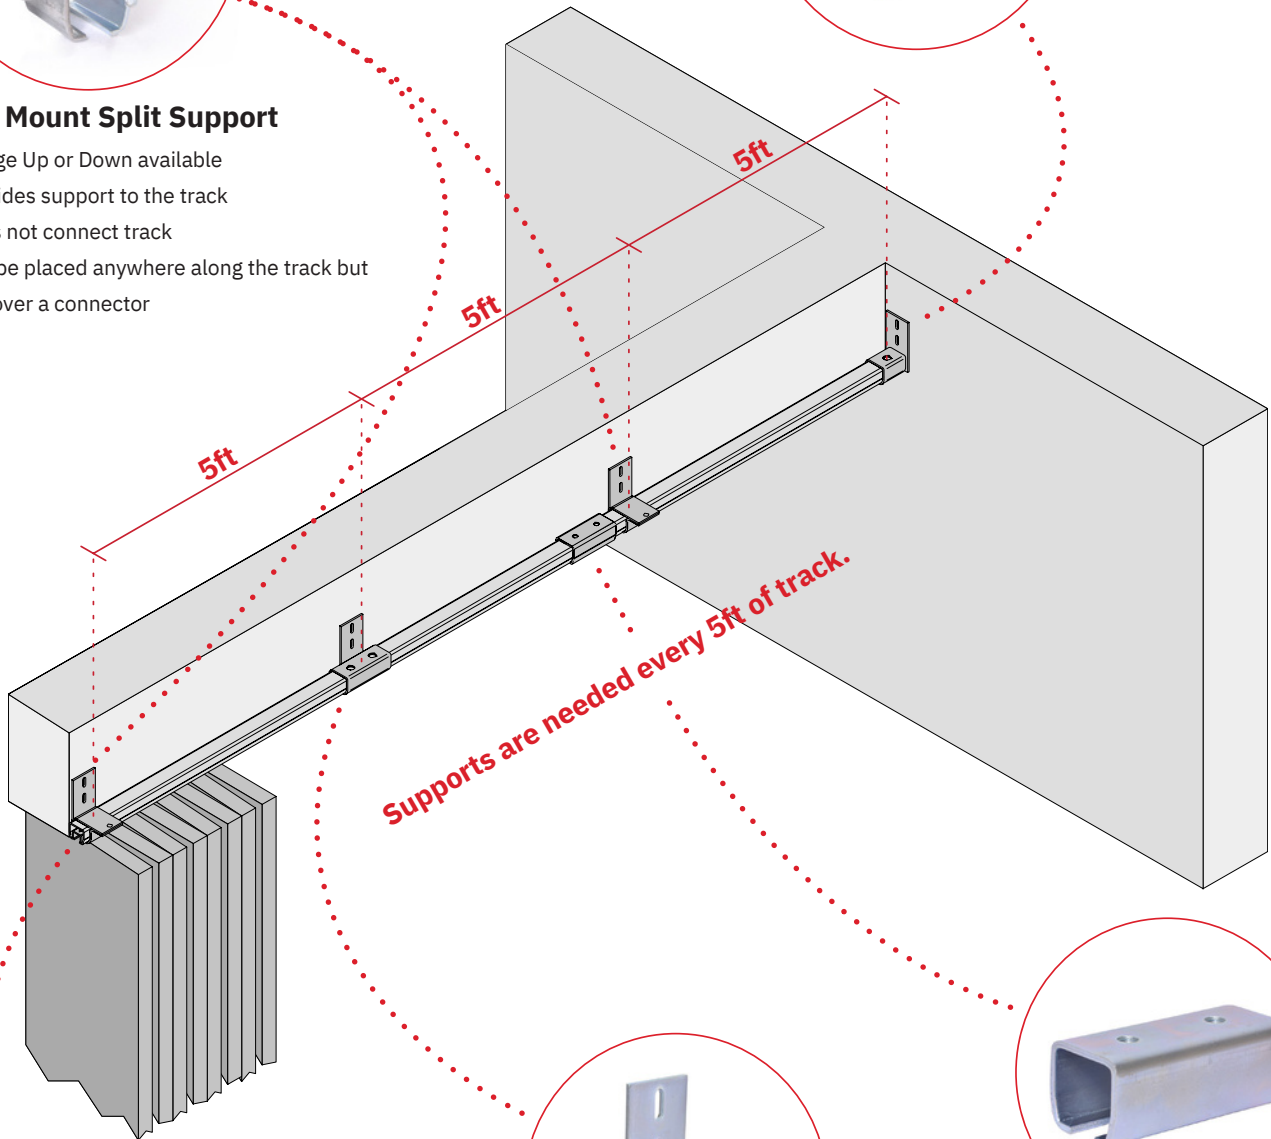

Adjustable End Stop



Wall Mount Connector

- Flange Up or Down available
- Connects straight track sections
- Also provides support to the track
- Includes 2 set screws



Plain Connector

- Connects straight track
- No support
- Includes 2 set screws




The image below provides an overall side elevation view.


Make sure the track is mounted at the correct height for the bottom edge of the curtain to hang 1" above the floor. If you ordered a floor sweep, about 2" of the sweep should sit on the floor.

You will find in our quotations where to put the top surface of the track, to insure the Curtain will hang at the correct height.

Flush or Front Mount





Under Mount

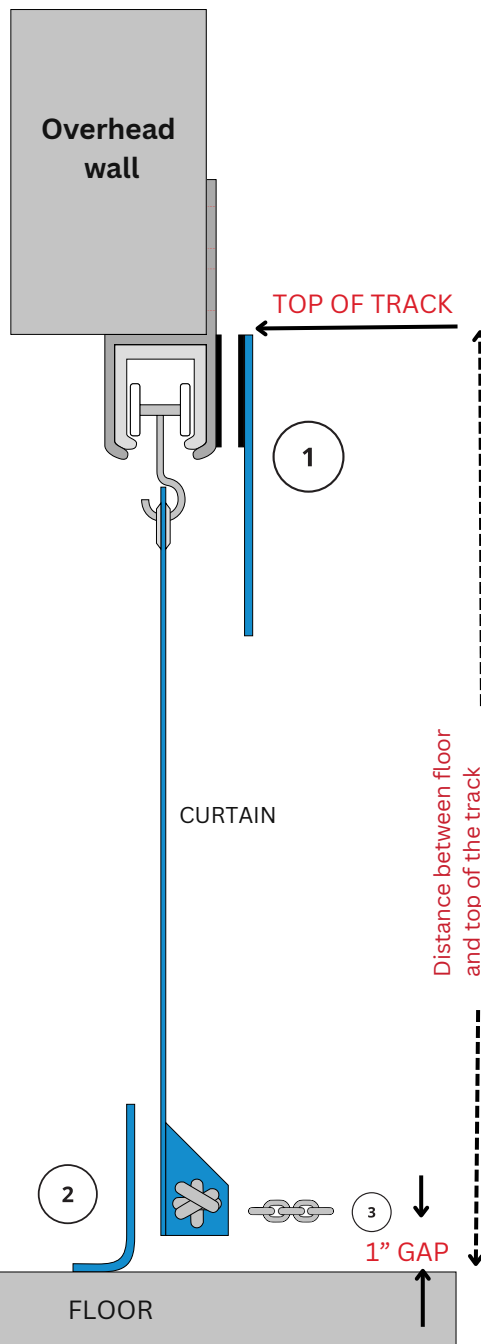



Options:

- 1 **Valance**
Velcro connected to the side of the track.
- 2 **Removable Floor Sweep**
Velcro connection to the curtain
- 3 **Chain Weighted Hem**


FLANGE UP

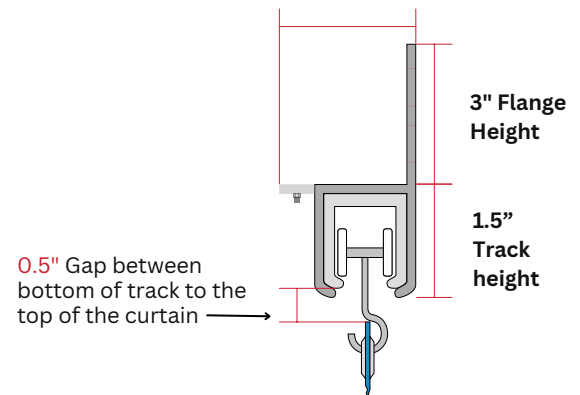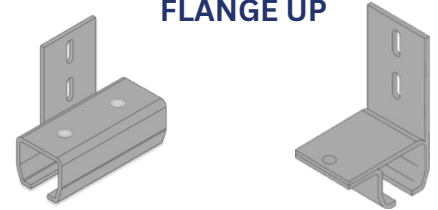

FLANGE DOWN

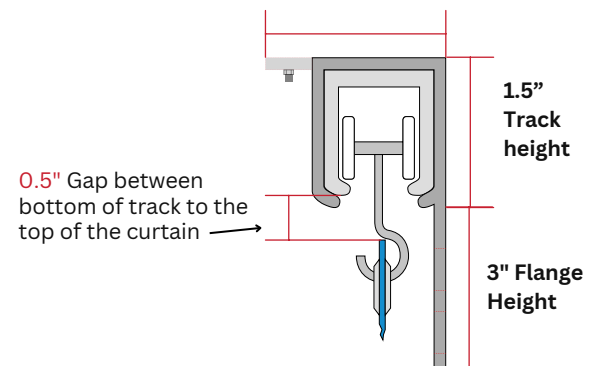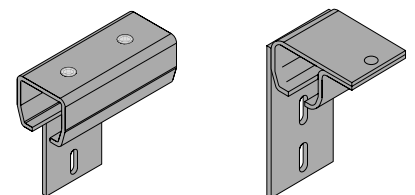

BARN DOOR CONCEPT

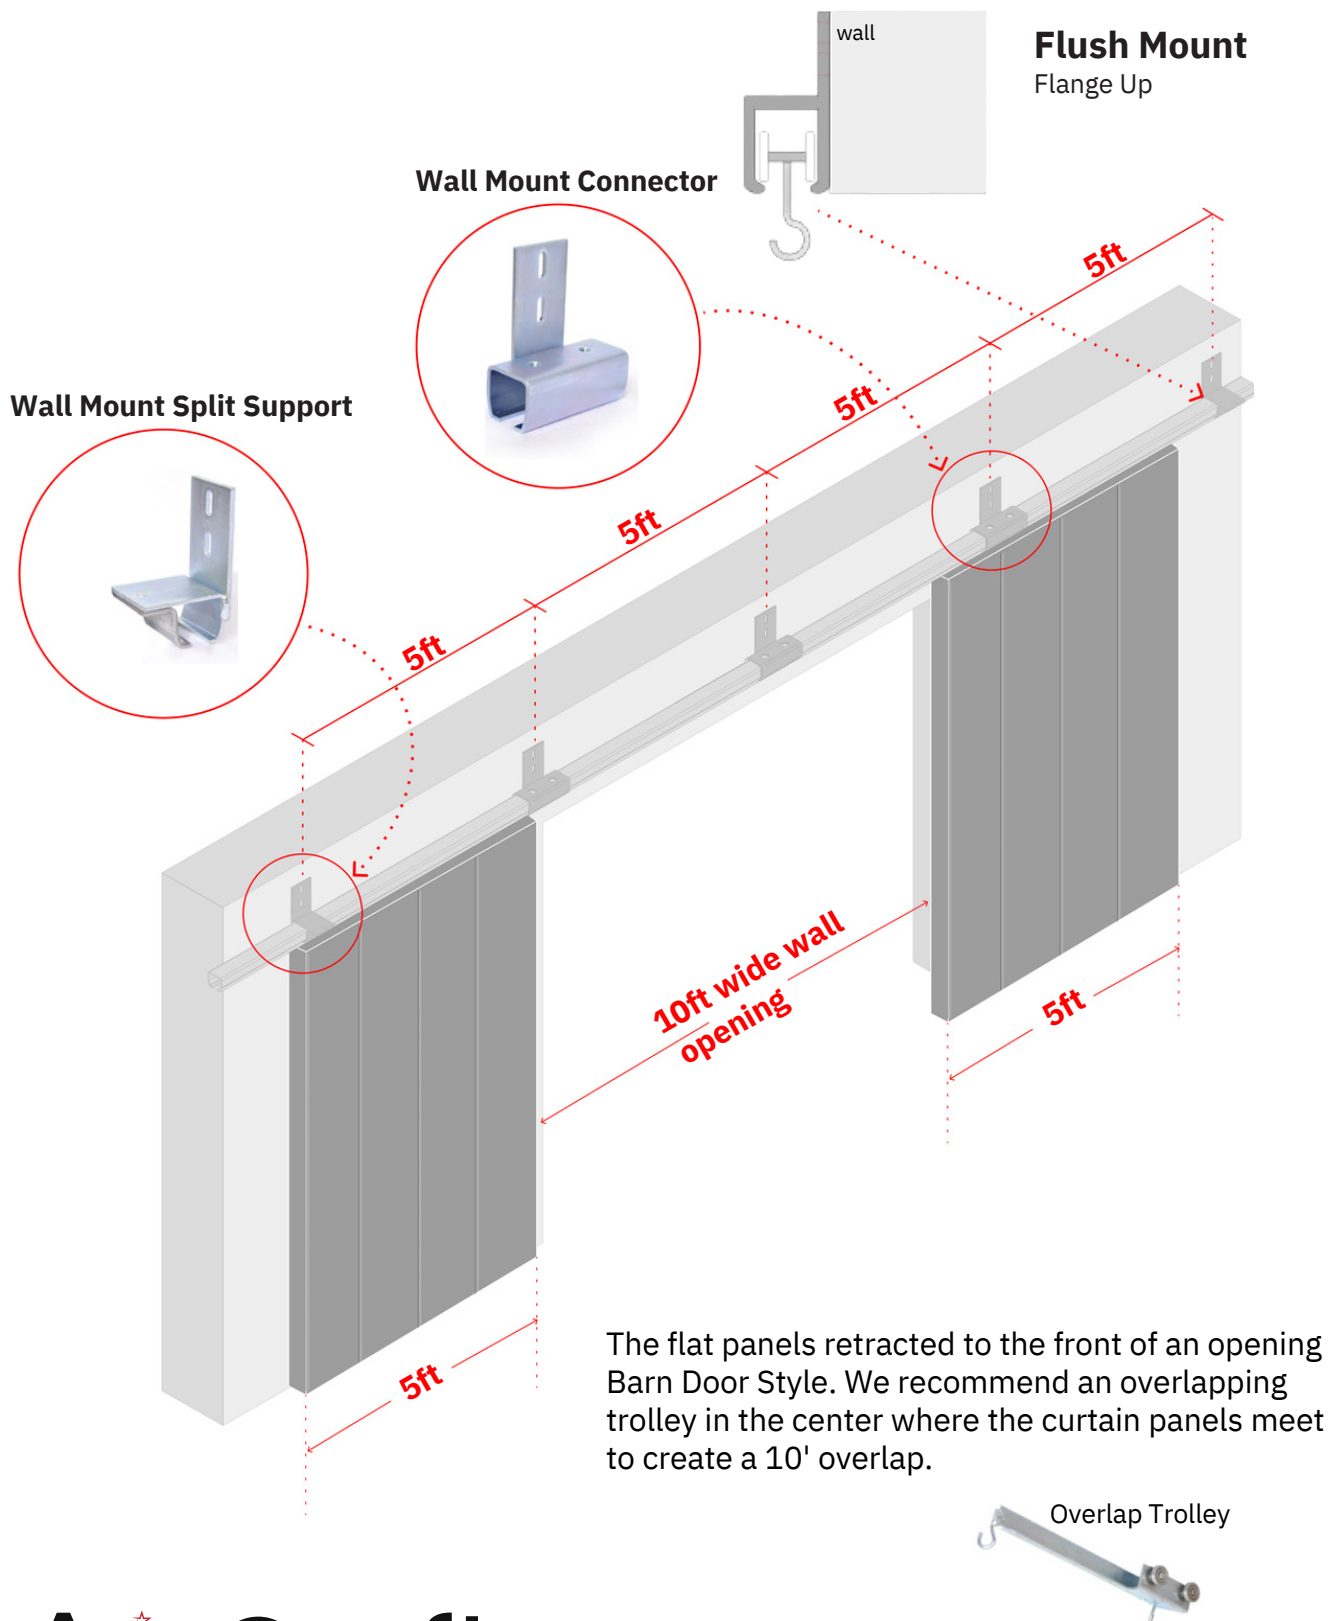

AmCraft
MANUFACTURING, INC.

Hardware Components



Wall Mount Flange Up Connector
incl. 2 sets screws



Wall Mount Flange Up Split Support



Wall Mount Flange Down Connector
incl. 2 sets screws



Wall Mount Flange Down Split Support



Curved Track 90°
incl. 2 sets screws



Curved Track 45°
incl. 2 sets screws



Straight Track
2', 4', 5', 6', 7' and 8'



Extra Set Screw



Plain Connector
incl. 2 sets screws



Wall Mount Flange Up
incl. 1 sets screws



Wall Mount Flange Down
incl. 1 sets screws



Adjustable End Stop



Steel Rollers



Nylon Rollers



Pull Rope Trolley Steel Wheels 4' or 10'



10'' Overlap Trolley Options with 4' or 10' Rope



Phone: 847-439-4565
Email: sales@amcraftonline.com
Website: www.amcraftindustrialcurtainwall.com