







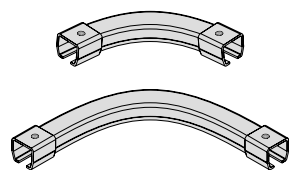





Some projects require **multiple** sets of **installation instructions**.




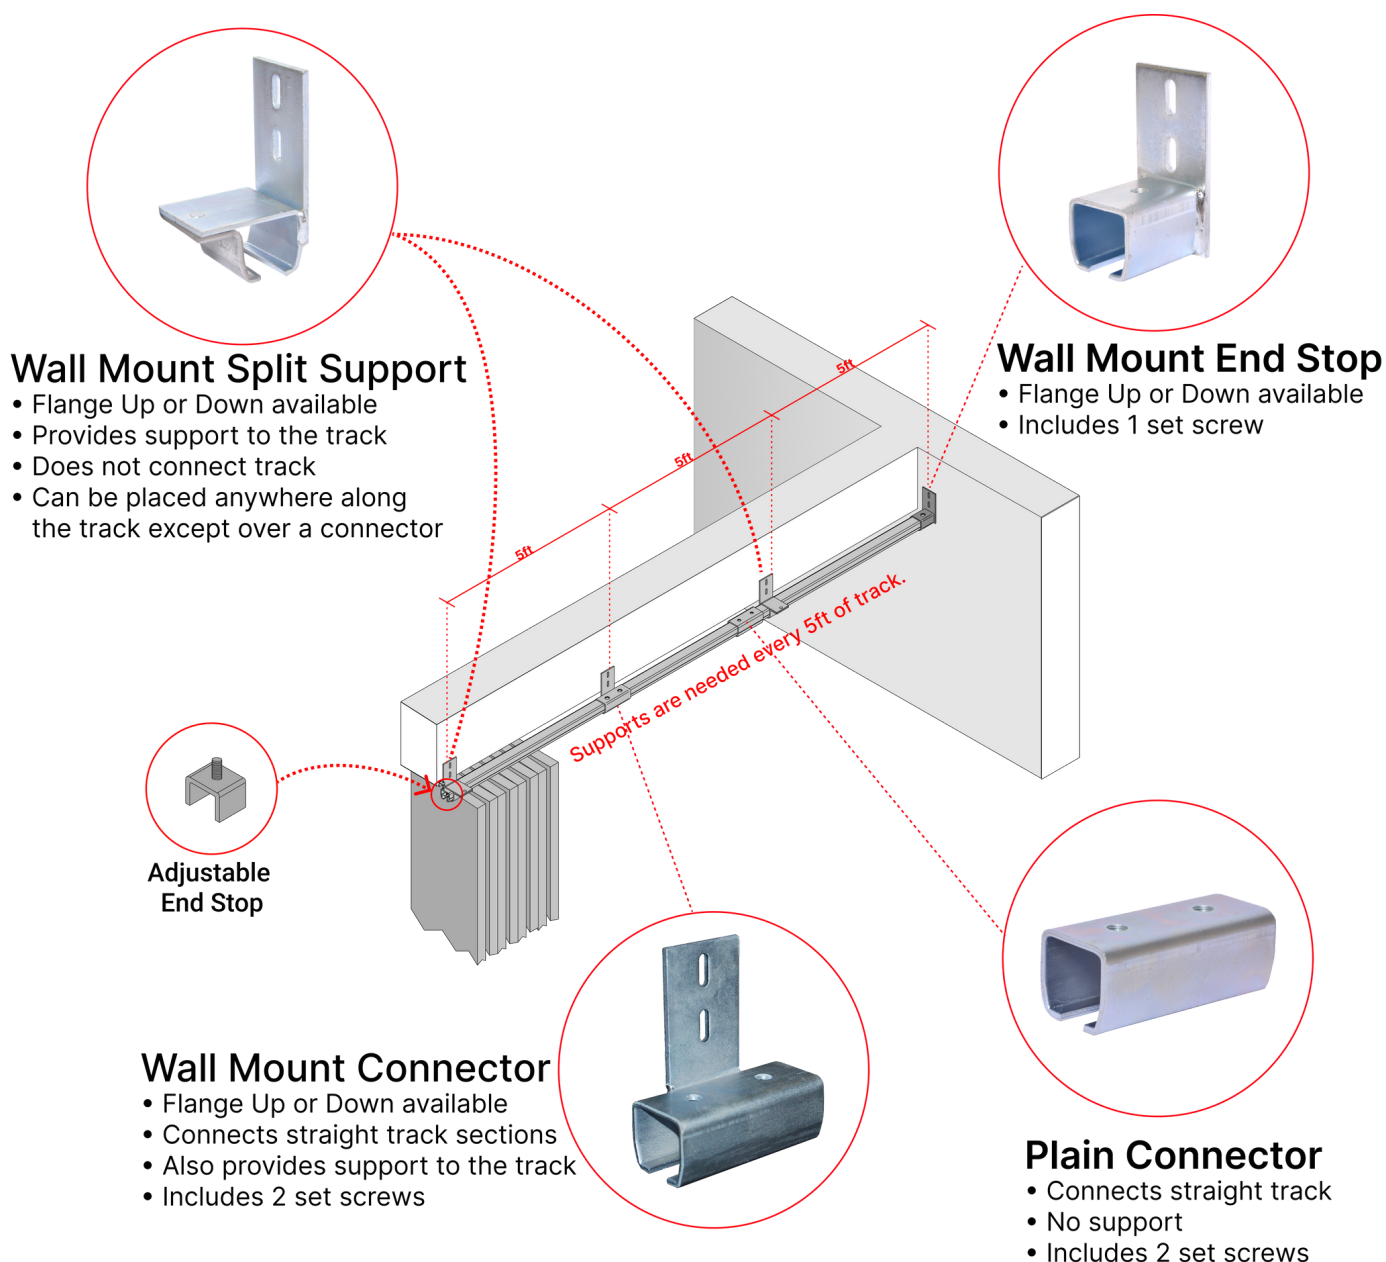


These installation instructions pertain to the **wall mount track system**. The wall mount track system is **frequently paired** with an another track systems, for which you will receive **additional** installation instructions. If the Wall mount system or the other track system needs **supporting hardware**, you will also receive additional instructions for the **supporting hardware** installation. If your project involves supporting hardware, **the supporting hardware is always installed first**.

#### Overall view of where to place the wall mount track system components



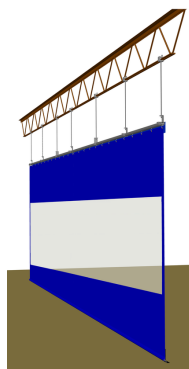- STEP 1**
- Compare the parts that you received with the packing list.
  - To obtain a visual reference for the parts listed on your packing list, refer to the parts listed on this components list.

Flange Up Connector	Flange Up Split Support	Flange Down Connector	Flange Down Split Support	Plain Connector
				
2x set screws included P/N: WMCU-K47	P/N: WMSU-K47A	2x set screws included P/N: WMCD-K46	P/N: WMSD-K46A	P/N: PC-K38
Qty.:	Qty.:	Qty.:	Qty.:	Qty.:
Set Screw	Straight Track	Curved Track	Roller	Steel Roller With Plate
				
All set screws come in one package	TR-K10 for 2' TR-K11 for 4' TR-K12 for 5'	TR-K13 for 6' TR-K14 for 7' TR-K15 for 8'	45° - P/N: 45P-K27 90° - P/N: 90P-K25 2x set screws included	Nylon - P/N: NY-K42 Steel - P/N: SR-K44
Qty.:	Qty.:	Qty.:	Qty.:	Qty.:
4 Wheel Trolley w/ Steel Rollers	Wall Mount End Stop	Adjustable End Stop	Pull Rope Trolley w/ Steel Rollers	Overlap Trolley w/ Steel Rollers
				
P/N: SR4W-1	Flange Up P/N: WMESU-K33 Flange Down P/N: WMESD-K32	P/N: ESA-K31A	4ft Rope - P/N: PRT-K80 10ft Rope - P/N: PRT-K10	4ft Rope - P/N: OLT-K70 10ft Rope - P/N: OLT-10
Qty.:	Qty.:	Qty.:	Qty.:	Qty.:

Curtain/Panels	Valance	Chain Weighted Bottom	Floor Sweep	
	 Velcro attaches to the side of the track	 Sewn into the hem	 Velcro attached to the bottom hem	
Qty.:	Qty.:	Qty.:	Qty.:	
Wall Attachment Strip	D-Ring	Curtain Tie-Back	Adhesive Velcro	6" Wide Vinyl Tape
 Wall attachment strip	 D-Ring with Carabiner	 Curtain Tie-Back	 Color - Black or White 1" or 2" wide	 Color - Royal Blue, Gray, Black, or White. Comes on a roll or 4' long strips
Qty.:	Qty.:	Qty.:	Qty.:	Qty.:


**Space for notes:**

The image below provides an overall side elevation view.


**STEP 2** Make sure the track is mounted at the correct height for the bottom edge of the curtain to hang 1" above the floor. If you ordered a floor sweep, about 2" of the sweep should sit on the floor.

**IMPORTANT NOTE:** The **TOP OF THE TRACK** has to be mounted at \_\_\_\_ft. \_\_\_\_in. off of the floor. This dimension is also located atop your quotation. Make sure that the track is leveled.

#### Flush or Front Mount




#### Under Mount

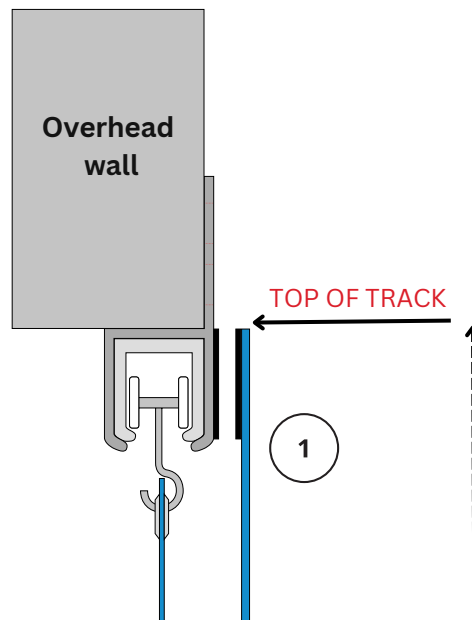


#### Options:



- 1 **Valance**  
Velcro connected to the side of the track.
- 2 **Removable Floor Sweep**  
Velcro connection to the curtain
- 3 **Chain Weighted Hem**

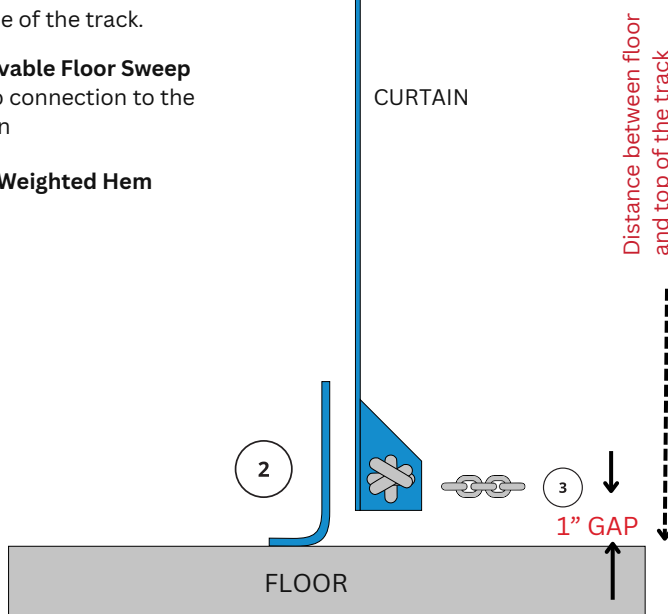

#### FLANGE UP

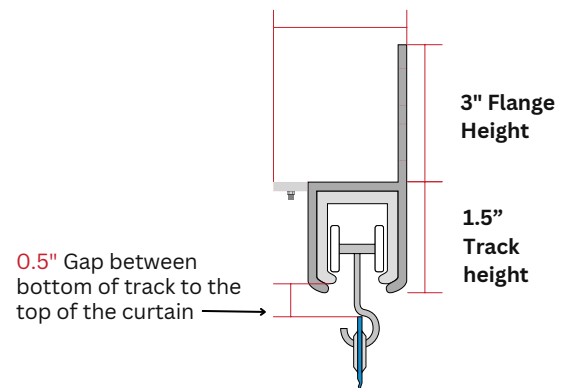

#### FLANGE DOWN

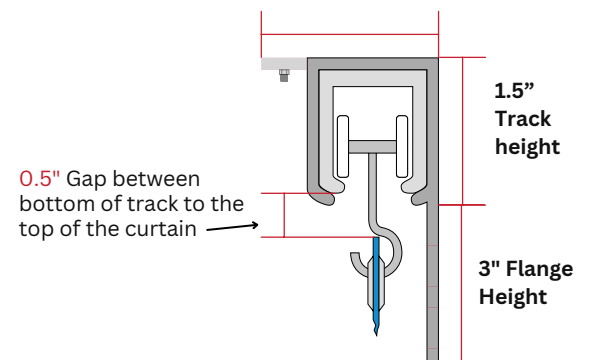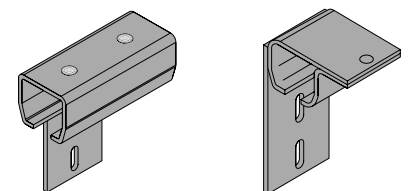




**Step 3** Determining where to use connectors, plain connectors and split supports.

**Please note:** AmCraft Mfg. does not provide the wall anchors.


Straight Run

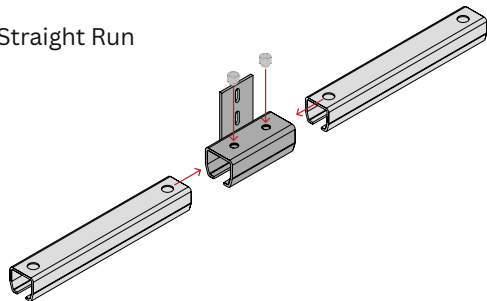

### Wall Connector

Connects two pieces of track together and supports the track as well. We recommend supporting the track every 5 feet.


Straight Run

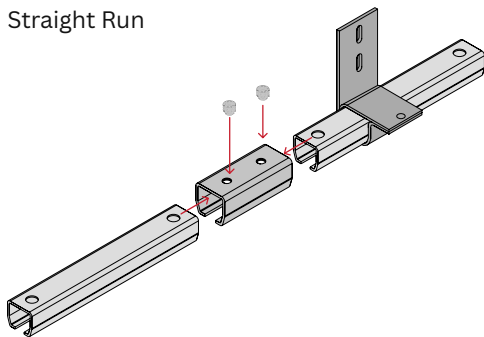

### Plain Connector with Wall Split Support

If you need to make a track connection where there is no wall available to support the connection, use a plain connector to connect the two track sections and a split support where you have wall space to support the track. The split support can be placed anywhere along the track except directly on top of a plain connector. It is recommended to support the track every 5'.


90° Curve

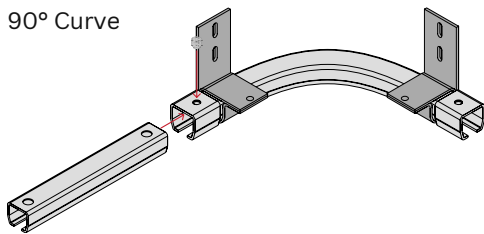

### Wall Split Support with 90° or 45° Track Curve

The curves have connectors welded onto each end. No additional connectors are needed. To support the curve, place a split support next to each connector and support from above.

Straight Run

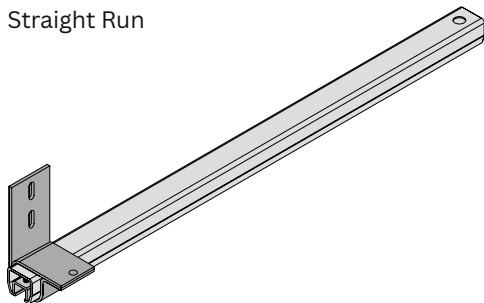

### Wall Split Support

If the track section does not run into a wall or you do not want to drill into your wall to mount a wall mount end stop, use a split support to support the end of the track. This is only possible if you have an anchoring point above.


**STEP 4** Mark the desired height position on the wall(s) for mounting the connectors and split supports.

**Important:** Different curtain heights are required for flush/front mount or under mount installations.

There are two ways to support the end of the track. Starting at one side:


- 1) Use a **wall mounted end stop** (flange up or down) if the track mounts to a wall
- 2) Use a **split support with an adjustable end stop** to support the track from above

#### Wall Mount End Stop




Flange Up - P/N: WMESU-K33  
Flange Down - P/N: WMESD-K32

If you are using the **wall mount end stop**, don't forget to place the set screws into the small hole on the top of the end stop. The wall fasteners are not provided by AmCraft Mfg.

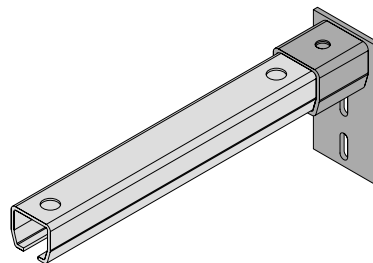


#### Wall Mount Split Support




WMSU-K47A

The second option to support the track end is to utilize a **wall mount flange up split support**. This method is only feasible if your building structure provides a point of connection above the split support to secure the track end from. If the track end does not mount to a wall and remains open, please insert an adjustable end stop to prevent the rollers from falling out of the track.

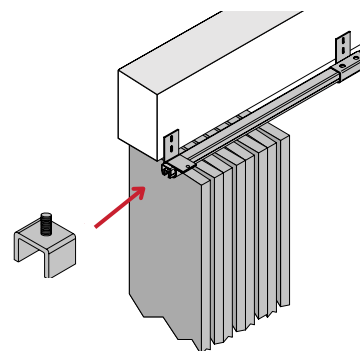


#### Flush or Front Mount

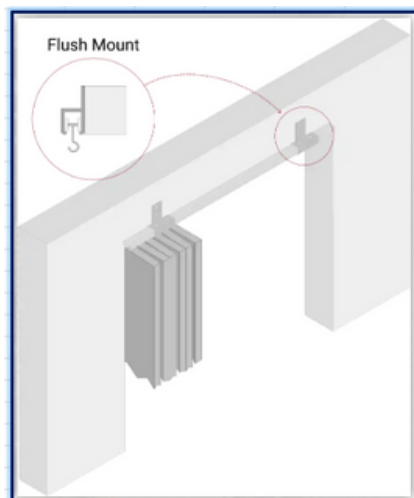


The **flush mount** and **under mount** option allow the curtain(s) to neatly retract inside the opening, thereby reducing its width. Please keep in mind the curtain thickness determines the folded width. Ask your sales representative for the retracted width of the various single layer, insulated and acoustic curtains.

#### Under Mount

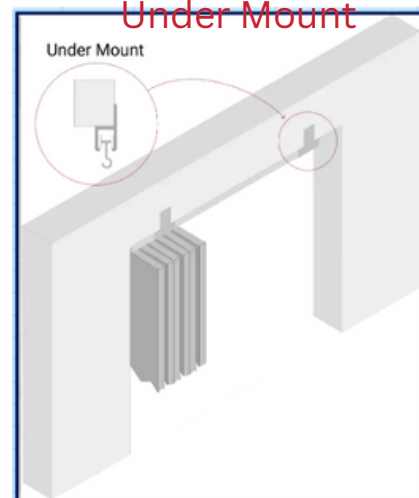


## Barn Door Concept

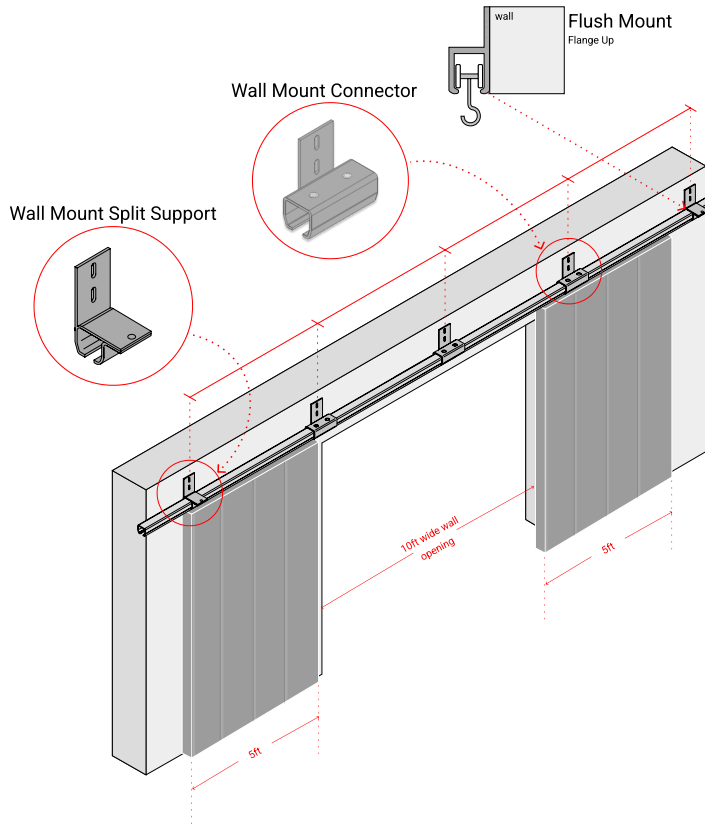

Flat insulated or acoustic panels are hung on the track. To enable the curtain to slide on one side of the opening or two halves of the curtain width on each side of the opening, it is necessary to mount a track double the width of the curtain. This approach works effectively if there is open wall space next to the opening. The barn door concept offers the advantage of not compromising the width of the opening.

Flush Mount - Extended

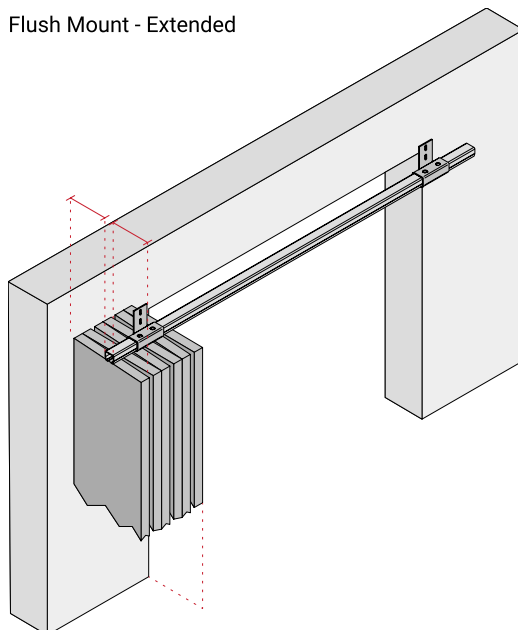


**Another way** to maintain the width of the opening is by mounting the track 8" away from the wall. This requires additional track width to accommodate the folded curtain on the side of the opening. Please note that AmCraft does not supply the necessary hardware to extend the track from the wall.

**Important:** Do not secure the last track section yet!

The rollers and end stops **must** be inserted **before** the access to the end opening is closed.  
(See below)

- STEP 5** Insert the trolleys and adjustable end stops into the track  
Each grommet on the top edge of your curtain needs a trolley hook. Please insert the amount of trolleys needed to hang the curtain(s) from the track. **(Be sure to consider special trolleys, as detailed below)**

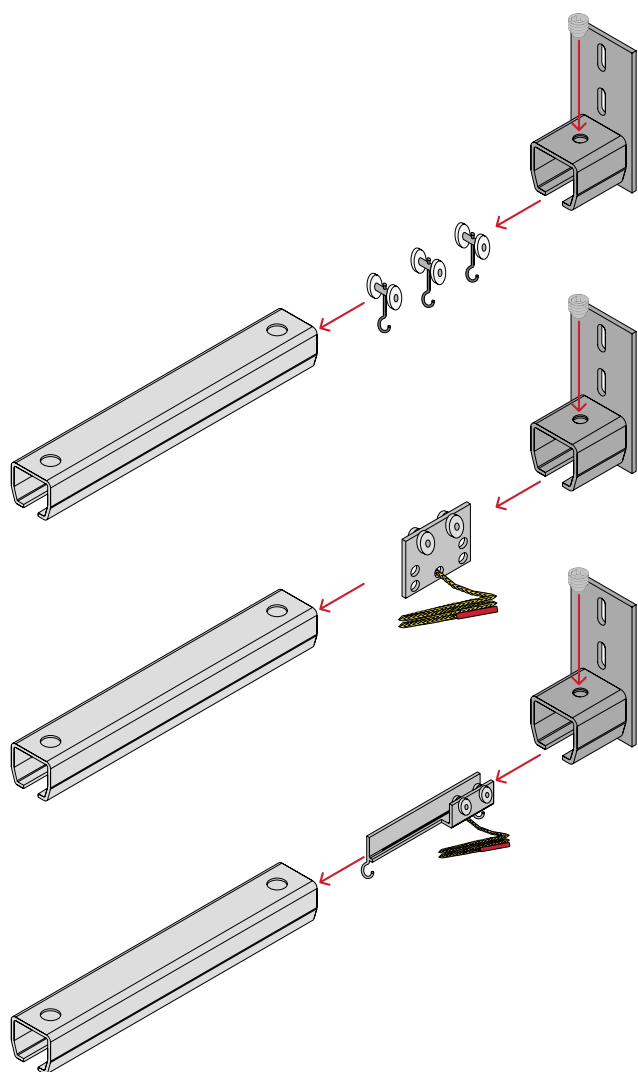


Install in the trolleys and set screw.

The pull rope trolley is connected to the curtain with 2 each nuts and bolts. The two bolts go through specially placed grommets on that end of the curtain.

Insert the overlap trolley. The overlap trolley has 2 hooks which need to be connected to **two grommets**.  
It is important to place the overlap trolley on the **right hand side of the left curtain**.  
(Orientation is always standing **outside** of the enclosed area, looking at the **front** of the curtains.)


The adjustable end stops can be used in **two ways**.

**1)** If the track does not mount to a wall, it is necessary to insert an adjustable end stop to prevent the rollers from falling out of the track.

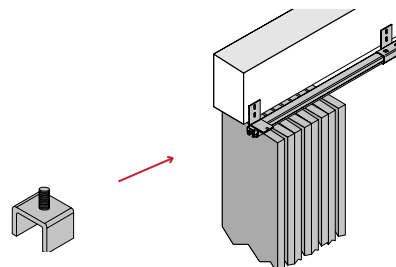

Adjustable End Stop  
P/N: ESA-K31A

**2)** To keep one side of a curtain stationary, place the end stop between the last and second to last trolley, effectively locking the last trolley in place and preventing movement of that edge of the curtain.

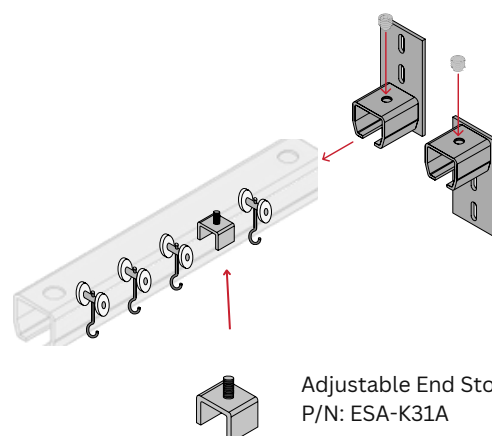

Adjustable End Stop  
P/N: ESA-K31A

## STEP 6 Securing and Tightening

Now you can **secure** the last piece of track.

### Important:

Make sure all of the nuts and bolts are tightened. This ensures a **safe installation**.

## STEP 7 Hang the Curtain(s)

Align and match the curtain(s) grommets with the appropriate trolley hooks. Make sure the front of the curtain faces outside of the enclosed area.

